



# A·B·DICK

## 432

### MIMEOGRAPH

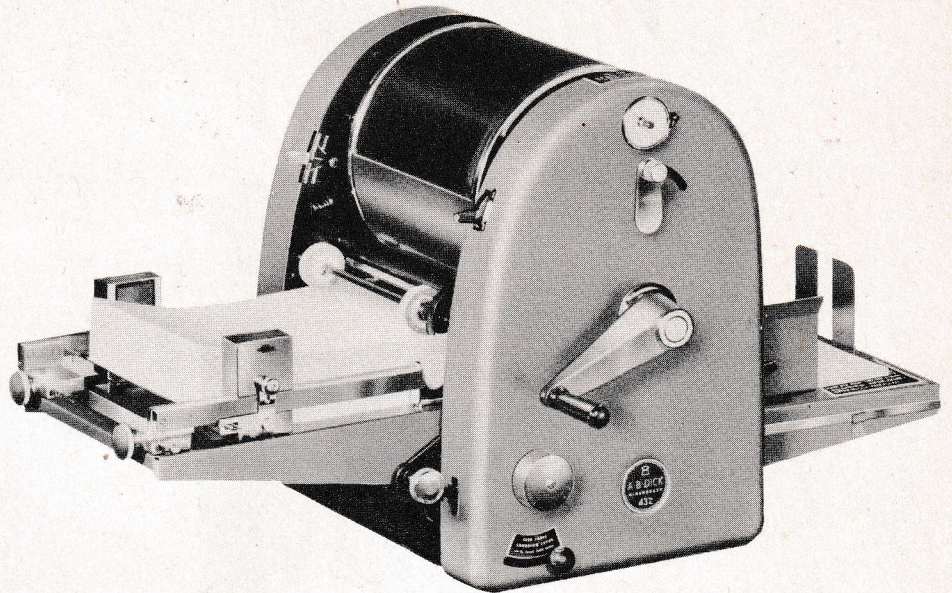


Table-top model hand operated mimeograph with 1 to 1 cylinder to hand crank ratio. All operating instructions and controls clearly identified on permanently mounted metalcalcs. Full ream feed (500 sheets sub 20 paper). Handles wide variety of weights and sizes of impression paper. Rubber retainer pads and breaker bar for single sheet feeding. Positive feed and paper stops for hairline registration. Automatic dual roller feed, easily adjusted to feed from margins of paper eliminating paper lint in copy areas. Simple, vertical, lateral and angular copy positioning adjustments. Enclosed cylinder with automatic inking and ink recovery system for long runs without reinking. Ink pad holding device permits use of two pads at one time for instant color changes.

#### GENERAL

Steel. Important working parts enclosed. Metal parts treated for corrosion resistance.

Smooth, easy to clean surface. Modern gray finish with hammered effect. Chrome and dark red trim.

Sealed ball and self-lubricating bearings in all hard working areas.

#### CYLINDER

Enclosed cylinder with ink reservoir system.

Four button stencil clamp for fast, accurate stencil loading. Stencils removable from either head or tail end.

Automatic tension adjustment keeps ink pad taut.

#### FEED

Automatic dual roll feed.

Automatically rising feed table. Capacity 500 sheets sub 20 paper.

#### SPECIFICATIONS

Parallel moving retainer rails with quick setting knob control.

Parallel moving, retractable, rubber retainer pads and breaker bar.

Calibrated scales on feed table for paper sizes from 9 x 15 inches to 3 x 5 inches.

#### DUPLICATING OPERATION

Fully automatic impression roller.

Manual operation with 1 to 1 cylinder to crank handle ratio.

Lever control for paper buckle.

Handles sub 16 to card weights in sizes from 3 x 5 to 9 x 15 inches.

Duplicating area 7 $\frac{3}{8}$  x 14 inches maximum.

Copy counter registers to 2000. When run is completed bell rings and feed is automatically shut off. Standard equipment.

Flat type strippers. Easily adjustable and removable.

Side and end guides in receiving tray adjustable for accurately stacking paper. Swinging tray bail.

#### COPY POSITION ADJUSTMENTS

Knob control for lateral adjustment  $\frac{1}{8}$  inch left or right;  $\frac{1}{4}$  inch overall.

Calibrated adjustment for raising or lowering copy 9 typewriter spaces up or down: 18 spaces overall.

Calibrated lever control for angular adjustment in relation to leading edge of paper.

#### DIMENSIONS

Height: 18 $\frac{3}{8}$  inches. Length: 33  $\frac{15}{16}$  inches.

Width: 23  $\frac{1}{16}$  inches.

Weight: 92 pounds.


#### ACCESSORIES

Dust cover standard equipment.

Model 22 cabinet.

Motor drive conversion kit No. 64600.

A. B. DICK COMPANY, 5700 WEST TOUHY AVENUE - CHICAGO 31, ILLINOIS

A. B. Dick and  are registered trademarks of A. B. Dick Company

3866

